




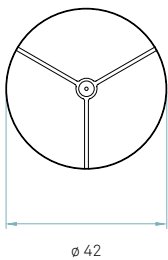


REF. SGEA S 28, 29, 24 & GEA S 24,30
Gea Large & Gea Small

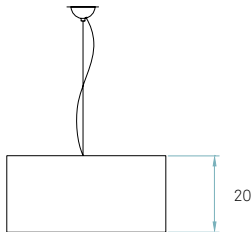

References



Certificates



Wood shade colours

- 20 Ivory White
- 21 Natural Cherry
- 22 Natural Beech
- 24 Yellow
- 25 Orange
- 26 Red
- 28 Blue
- 29 Grey
- 30 Turquoise
- 31 Chocolate
- 32 Pink

Components




Bottom diffuser
Matt satin acrylic



Metal canopy
Brushed Nickel
ø 10 cm - disc ø 14 cm

Electrical cable
Transparent
2 m drop

Steel cable
2 m drop



Box size
51 x 51 x 32 cm

Box volume
0,083 m³

Weight
Gross - 4,2 Kg
Net - 1,9 Kg

Recommended bulbs (Not Included)



E27



CFL Globe
1 x 23 W max.

or



LED Globe DIM
1 x 14 W max.

Energy class





Fluorescent G-Club / SLIM SUSPENSION

by Mariví Calvo



REF. G S 24
Gea Club Slim

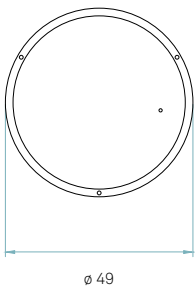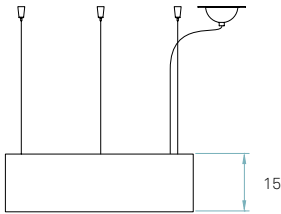

References

- G S
- G S DIM
- G S DIMRC

Certificates

- CE
- Class I
- 220 - 250V
- FSC
www.fsc.org
FSC® C110841
The mark of responsible forestry

Wood shade colours

- 20 Ivory White
- 21 Natural Cherry
- 22 Natural Beech
- 24 Yellow
- 25 Orange
- 26 Red
- 28 Blue
- 29 Grey
- 30 Turquoise
- 31 Chocolate
- 32 Pink

Components

- DIFF
- Top diffuser**
Black or White
- Note:** The standard top diffuser is white. Black is also available if you want no upward light diffusion.
- Bottom diffuser**
Matt satin acrylic

- Metal canopy**
Brushed Nickel
ø 10 cm - disc ø 14 cm
- Electrical cable**
Transparent 2 m drop
- Steel cable**
3 x 2 m drop

Packaging

- Box size**
61 x 61 x 34 cm
- Box volume**
0,127 m³
- Weight**
Gross - 7,8 Kg
Net - 3,8 Kg



- T5C**
-
- Circline Fluorescent**
1 x 60 W
(included)

- Energy class**
- A+
- A+
- A
- B
- A
- Tube included



- Ballast**
- TRIDONIC
1 unit - Ref. 87500513
- PHILIPS
1 unit - Ref. 913700761966
- BAG
1 unit - Ref. 10096389
+ Remote Control - DANLERS

Details

Input Voltage	Luminous Flux *	CRI	Watt.	Total Watt.	CCT	Lifetime (L70)
220 - 250V	3559 lm	85	1 x 60 W	60 W	3000 K	12000h

* Measurements taken using white shades, Veneer Ref: 20 Ivory White

References

- G S LED DIM0-10V**
- G S LED DIMBT**

Certificates

Class I

Dimmable:
120 - 277V

Bluetooth Dimming:
220 - 240V

FSC® C110841
The mark of responsible forestry

Wood shade colours

- 20 Ivory White
- 21 Natural Cherry
- 22 Natural Beech
- 24 Yellow
- 25 Orange
- 26 Red
- 28 Blue
- 29 Grey
- 30 Turquoise
- 31 Chocolate
- 32 Pink



REF. G S LED 20
Gea Club Slim

Components

DIFF

Top diffuser
Black or White

Note: The standard top diffuser is white. Black is also available if you want no upward light diffusion.

Bottom diffuser
Matt satin acrylic

Metal canopy
Brushed Nickel
ø 17 cm

Electrical cable
Transparent 2 m drop


Steel cable
3 x 2 m drop

Packaging

Box size
61 x 61 x 34 cm

Box volume
0,127 m³

Weight
Gross - 8,1 Kg
Net - 4,1 Kg

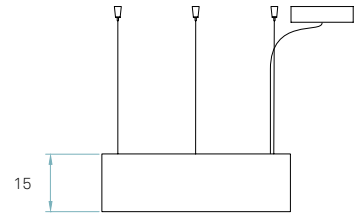

LED

LED

Linear Module
4 x 5,5 W 350mA

Energy class

A+

LED integrated


INFO

Driver

EFORE
1 unit - Ref. RCL030-0700B

EFORE
1 unit - Ref. RCL030-0700B
+ Bluetooth Control - CASAMBI / ELT
1 unit - Ref. CBU - ASD

Driver housed in canopy.

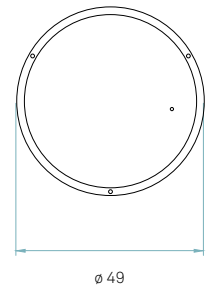

Details

Input Voltage	Luminous Flux *	CRI	Watt.	CCT	Lifetime (L70)
120 - 277V	1866 lm	90	25 W	3000 K	40000h
220 - 240V					

* Measurements taken using white shades, Veneer Ref: 20 Ivory White