

REF.

SAT SP LED DIM0-10V
 SAT SP LED DIMDALI
 SAT SP LED DIMBT

LIGHT SOURCE

Class I



120 - 277V: Dimmable 0-10V or DALI
220-240V: Dimmable Bluetooth - BT

Driver:

Constant Current 700mA

LED Integrated:

Led module
 Energy class A*

3.000K, CRI>90, 25W, 50-60Hz, 1866 lm*
 Available in 2.700K and 4.000K on request

*Measurements obtained by photometric laboratory tests using ivory white shades. Veneer Ref: 20 Ivory White.

PACKAGING

Box Size: 61 × 61 × 34 cm

Box Volume: 0,13 m³

Weight: Gross - 7,3 Kg | Net - 3,1 Kg

MATERIALS & COMPONENTS

Wood Veneer Shade

- White Top Diffuser
 Black is available if you want no upward light diffusion
- Matt Satin Acrylic Bottom Diffuser

Nickel Metal Canopy:











- ø 17 cm - DIM0-10V & BT
- ø 23 cm - DALI



3 Steel Cables: 2,5 m drop

Transparent Electrical Cable: 2,5 m drop

FINISHES

WOOD VENEER

- | | | | |
|---|-------------------|--|--------------|
|  | 20 Ivory White |  | 26 Red |
|  | 21 Natural Cherry |  | 28 Blue |
|  | 22 Natural Beech |  | 29 Grey |
|  | 24 Yellow |  | 33 Pale Rose |
|  | 25 Orange |  | 34 Sea Blue |

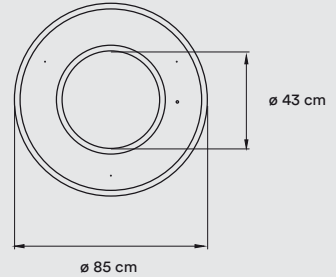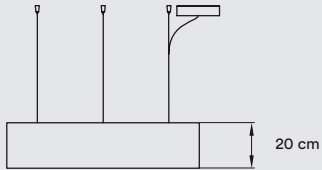**REF.**

SAT SM LED DIM0-10V
 SAT SM LED DIMDALI
 SAT SM LED DIMDALI or DIMBT

LIGHT SOURCE

Class I



120 - 277V: Dimmable 0-10V or DALI
220-240V: Dimmable Bluetooth - BT

Driver:

Constant Current 1400mA

LED Integrated:

Led module
 Energy class A*

3.000K, CRI>90, 57W, 50-60Hz, 4593 lm*
 Available in 2.700K and 4.000K on request

*Measurements obtained by photometric laboratory tests using ivory white shades. Veneer Ref: 20 Ivory White.

PACKAGING

Box Size: 110 x 110 x 36 cm

Box Volume: 0,44 m³

Weight | Gross: 16,6 Kg | Net - 7,9 Kg

MATERIALS & COMPONENTS

Wood Veneer Shade

- White Top Diffuser
 Black is available if you want no upward light diffusion
- Matt Satin Acrylic Bottom Diffuser











Nickel Metal Canopy:



- ø 17 cm - DIM0-10V & BT
- ø 23 cm - DALI

3 Steel Cables: 2,5 m drop

Transparent Electrical Cable: 2,5 m drop

FINISHES**WOOD VENEER**

- | | | | |
|---|-------------------|--|--------------|
|  | 20 Ivory White |  | 26 Red |
|  | 21 Natural Cherry |  | 28 Blue |
|  | 22 Natural Beech |  | 29 Grey |
|  | 24 Yellow |  | 33 Pale Rose |
|  | 25 Orange |  | 34 Sea Blue |

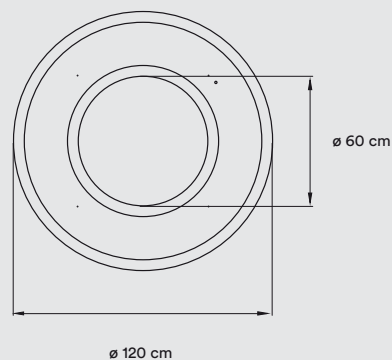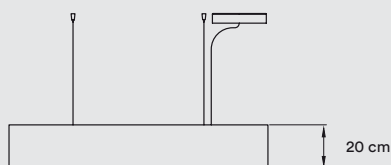

REF.

SAT SG LED DIM0-10V
 SAT SG LED DIMDALI
 SAT SG LED DIMBT

LIGHT SOURCE

Class I



120 - 277V: Dimmable 0-10V or DALI
 220-240V: Dimmable Bluetooth - BT

Drivers:

- Constant Current 1400mA
 - Constant Current 700mA

LED Integrated:

Led module
 Energy class A*

3.000K, CRI>90, 85W, 50-60Hz, 6890 lm*
 Available in 2.700K and 4.000K on request

*Measurements obtained by photometric laboratory tests using ivory white shades. Veneer Ref: 20 Ivory White.

PACKAGING

Box Size: 139 × 139 × 37 cm - Wood crated for transport

Box Volume: 0,71 m³

Weight | Gross: 55,3 Kg | Net - 15,3 Kg

MATERIALS & COMPONENTS

Wood Veneer Shade

- White Top Diffuser
 Black is available if you want no upward light diffusion
 - Matt Satin Acrylic Bottom Diffuser











Nickel Metal Canopy: ø 23 cm

4 Steel Cables: 2,5 m drop

Transparent Electrical Cable: 2,5 m drop

FINISHES

WOOD VENEER

- | | |
|---|--|
|  20 Ivory White |  26 Red |
|  21 Natural Cherry |  28 Blue |
|  22 Natural Beech |  29 Grey |
|  24 Yellow |  33 Pale Rose |
|  25 Orange |  34 Sea Blue |