



New Wave


by Ray Power



REF. NWA S 26-24
New Wave

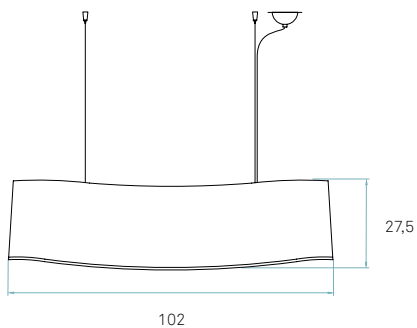

References



Certificates



Class I

220 - 250V



Wood shade colours

Exterior & Interior



26 Red / 24 Yellow

or

Exterior & Interior



30 Turquoise / 24 Yellow

or

Exterior & Interior



28 Blue / 24 Yellow

or

Exterior & Interior



21 Cherry / 20 White

If you would like any other colour combinations please consult with our offices.

Components



Metal canopy
Brushed Nickel
ø 10 cm - disc ø 14 cm

Electrical cable
Transparent 2 m drop



Steel cable
4 x 2 m drop



Box size
121 x 31 x 34 cm

Box volume
0,128 m³

Weight
Gross - 4,9 Kg
Net - 1,9 Kg

Recommended bulbs (Not Included)



E27



CFL Mini Globe
2 x 9 W max.

or



CFL Spherical DIM
2 x 11 W max.

or



LED Spherical
2 x 16,5 W max.

Energy class



References

NWAV S LED DIM0-10V

NWAV S LED DIMBT

Certificates



Class I

Dimmable:
120 - 277V

Bluetooth Dimming:
220 - 240V



Wood shade colours

Exterior & Interior

26 Red / 24 Yellow

or

Exterior & Interior

30 Turquoise / 24 Yellow

or

Exterior & Interior

28 Blue / 24 Yellow

or

Exterior & Interior

21 Cherry / 20 White

If you would like any other colour combinations please consult with our offices.



REF. NWAV S LED 28-24
New Wave

Components



Metal canopy
Brushed Nickel
34 x 11,5 x 5 cm

Electrical cable
Transparent 2 m drop



Steel cable
4 x 2 m drop

Packaging



Box size
121 x 31 x 34 cm

Box volume
0,128 m³

Weight
Gross - 6 Kg
Net - 2,8 Kg





LED
 Linear Module
2 x 5,5 W 350mA

Energy class
 A+
LED integrated



Driver
 EFORE
1 unit - Ref. RCL015-0440A
 EFORE
1 unit - Ref. RCL015-0440A
+ Bluetooth Control - CASAMBI / ELT
1 unit - Ref. CBU - ASD

Driver housed in canopy.

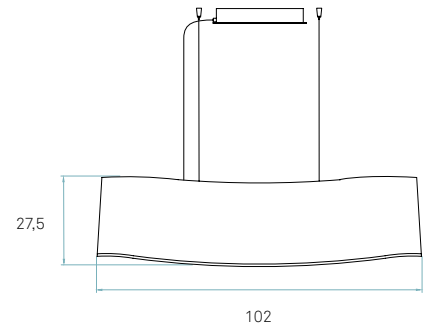

Details

Input Voltage	Luminous Flux *	CRI	Watt.	CCT	Lifetime (L70)
120 - 277V	760 lm	90	16 W	3000 K	40000h
220 - 240V					

* Measurements taken using Blue exterior & Yellow interior shades, Veneer Ref: 28 Blue & 24 Yellow