



POSITION 1

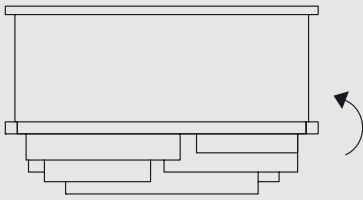

POSITION 2

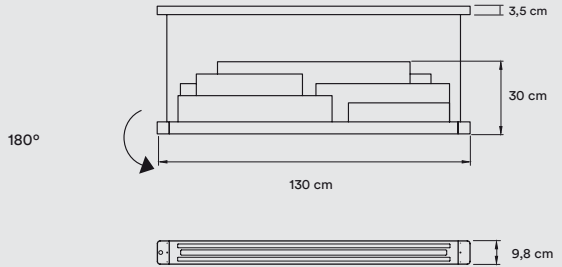

REF.

- SKYL S IV/IV LED DIM0-10V
- SKYL S IV/GD LED DIM0-10V
- SKYL S BK/IV LED DIM0-10V
- SKYL S BK/GD LED DIM0-10V
- SKYL S BN/IV LED DIM0-10V
- SKYL S BN/GD LED DIM0-10V
- SKYL S GD/IV LED DIM0-10V
- SKYL S GD/GD LED DIM0-10V

REF.

- SKYL S IV/IV LED DIMDALI & DIMBT
- SKYL S IV/GD LED DIMDALI & DIMBT
- SKYL S BK/IV LED DIMDALI & DIMBT
- SKYL S BK/GD LED DIMDALI & DIMBT
- SKYL S BN/IV LED DIMDALI & DIMBT
- SKYL S BN/GD LED DIMDALI & DIMBT
- SKYL S GD/IV LED DIMDALI & DIMBT
- SKYL S GD/GD LED DIMDALI & DIMBT

LIGHT SOURCE

Class I



Dual Circuit - DC: Enables independent dimming and control of the wood shades and the downlight

- 120 - 277V: Dimmable 0-10V & DALI
- 220-240V: Dimmable Bluetooth - BT

Drivers:

- Constant Current 700mA (shades)
- Constant Current 700mA (downlight)

LED Integrated:

Led module 350mA
Energy class A*

3000K, CRI90, 50W, 50-60Hz

MATERIALS & COMPONENTS

Multimaterial Shade
Wood Veneer, Perforated Metal & Textured Glass

Metal Structure & Canopy

4 Black Steel Cables: 2 m drop

2 Black Coaxial Cables: 2 m drop

FINISHES

WOOD VENEER

- 20 Ivory White
- 22 Natural Beech

PERFORATED METAL

- IV-Matt Ivory with Wood Veneer 20
- GD-Gold with Wood Veneer 22

METAL

- IV-Matt Ivory
- *BN-Black Nickel
- BK-Matt Black
- *GD-Gold

*On Request

PACKAGING

Box Size: 151 x 56 x 18 cm

Box Volume: 0,152 m³

Weight: Gross - 18,9 Kg | Net - 12,3 Kg