



Fluorescent Spiro / MEDIUM SUSPENSION
by Remedios Simón



REF. SPRO SM W 28
Spiro Medium



References

- SPRO SM W
SPRO SM BK
SPRO SM 21
SPRO SM 26
- SPRO SM W DIM
SPRO SM BK DIM
SPRO SM 21 DIM
SPRO SM 26 DIM
- SPRO SM W DIMRC
SPRO SM BK DIMRC
SPRO SM 21 DIMRC
SPRO SM 26 DIMRC

Awards



Shade / Wood Outer Shell

- Opaque Wood Outer shell ***
- 21 Natural Cherry
 - 26 Red tulip poplar

Spiral colours *

- 21 Natural Cherry
- 26 Red

* Additional colours available on request.

Certificates



Class I
220 - 250V

Shade / Acrylic Outer Shell

- Opaque Acrylic Outer shell**
- W Matt White
 - BK Matt Black

Spiral colours

- 20 Ivory White
- 21 Natural Cherry
- 22 Natural Beech
- 24 Yellow
- 25 Orange
- 26 Red
- 28 Blue
- 29 Grey
- 30 Turquoise
- 31 Chocolate
- 32 Pink

Components



Top diffuser
Black or White

Note: The standard top diffuser is white. Black is also available if you want no upward light diffusion.

Bottom diffuser
Transparent acrylic




Metal canopy
Brushed Nickel
ø 10 cm - disc ø 14 cm

Electrical cable
Transparent 2 m drop



Steel cable
4 x 2 m drop



Box size
95 x 92 x 48 cm
Wood crated for transport

Box volume
0,42m³

Weight
Gross - 40,9 Kg | W - BK
Net - 9,6 Kg
Gross - 40 Kg | 21 - 26
Net - 8,3 Kg



T5

Linear Fluorescent
4 x 24 W
(included)

Energy class

- A⁺⁺
 - A⁺
 - A
 - B
- Tube included



Ballast


- TRIDONIC
1 unit - Ref. 22185212
- TRIDONIC
1 unit - Ref. 22176210
- BAG
2 units - Ref. 10097296
+ Remote Control - DANLERS


Details

| Input Voltage | Luminous Flux * | CRI | Watt. | Total Watt. | CCT | Lifetime (L70) |
|---------------|-----------------|-----|----------|-------------|--------|----------------|
| 220 - 250V | 1397 lm | 85 | 4 x 24 W | 96 W | 3000 K | 30000h |

* Measurements taken using matt white outer shell and white shades, Veneer Ref: 20 Ivory White

References

 SPRO SM W LED DIMO-10V
SPRO SM BK LED DIMO-10V
SPRO SM 21 LED DIMO-10V
SPRO SM 26 LED DIMO-10V

 SPRO SM W LED DIMBT
SPRO SM BK LED DIMBT
SPRO SM 21 LED DIMBT
SPRO SM 26 LED DIMBT



Awards


HD Las Vegas 2012



Shade / Wood Outer Shell

Opaque Wood Outer shell *

 21 Natural Cherry
 26 Red tulip poplar

Spiral colours *

 21 Natural Cherry
 26 Red

* Additional colours available on request.

Certificates



Class I

Dimmable:
120 - 277V

Bluetooth Dimming:
220 - 240V

Shade / Acrylic Outer Shell

Opaque Acrylic Outer shell

 W Matt White
 BK Matt Black

Spiral colours

 20 Ivory White
 21 Natural Cherry
 22 Natural Beech
 24 Yellow
 25 Orange
 26 Red
 28 Blue
 29 Grey
 30 Turquoise
 31 Chocolate
 32 Pink



REF. SPRO SM BK LED 29
Spiro Medium

Components

Packaging



Top diffuser
Black or White

Note: The standard top diffuser is white. Black is also available if you want no upward light diffusion.

Bottom diffuser
Transparent acrylic



Metal canopy
Brushed Nickel
ø 17 cm

Electrical cable
Transparent 2 m drop




Steel cable
4 x 2 m drop




Box size
95 x 92 x 48 cm
Wood crated for transport

Box volume
0,42 m³

Weight
Gross - 42,2 Kg | W - BK
Net - 10,9 Kg
Gross - 41,3 Kg | 21 - 26
Net - 10,1 Kg

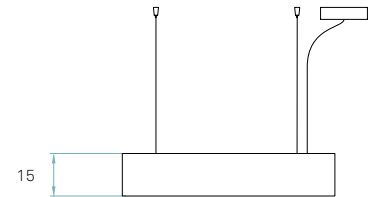

LED


 **Linear Module**
10 x 5,5 W 350mA


Energy class

 **A⁺**
LED integrated




Driver

 EFORE
1 unit - Ref. RCL050-1400B

 EFORE
1 unit - Ref. RCL050-1400B
+
Bluetooth Control - CASAMBI
1 unit - Ref. CBU - ASD

Driver housed in canopy.



ø 75

Details



| Input Voltage | Luminous Flux * | CRI | Watt. | CCT | Lifetime (L70) |
|-------------------------|------------------------|-----|-------|--------|----------------|
| 120 - 277V / 220 - 240V | 1134 lm ⁽¹⁾ | 90 | 48 W | 3000 K | 40000h |
| 120 - 277V / 220 - 240V | 730 lm ⁽²⁾ | 90 | 48 W | 3000 K | 40000h |

* (1) Measurements taken using matt white outer shell and white shades, Veneer Ref: 20 Ivory White
(2) Measurements taken using matt white outer shell and white shades, Veneer Ref: 21 Natural Cherry

Fluorescent Spiro / LARGE SUSPENSION
by Remedios Simón



REF. SPRO SG BK 22
Spiro Large

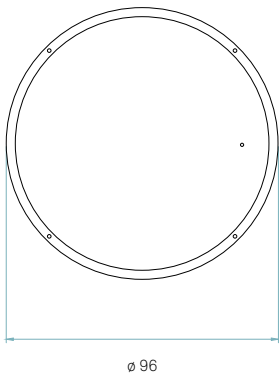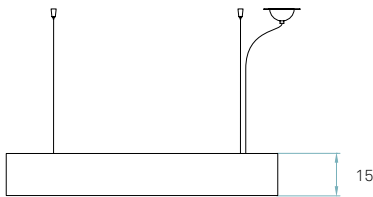

References

- SPRO SG W
SPRO SG BK
SPRO SG 21
SPRO SG 26
- SPRO SG W DIM
SPRO SG BK DIM
SPRO SG 21 DIM
SPRO SG 26 DIM
- SPRO SG W DIMRC
SPRO SG BK DIMRC
SPRO SG 21 DIMRC
SPRO SG 26 DIMRC

Awards



Shade / Wood Outer Shell

- Opaque Wood Outer shell *
- 21 Natural Cherry
 - 26 Red tulip poplar

Spiral colours *

- 21 Natural Cherry
- 26 Red

* Additional colours available on request.

Certificates



Class I
220 - 250V

Shade / Acrylic Outer Shell

- Opaque Acrylic Outer shell
- W Matt White
 - BK Matt Black

Spiral colours

- 20 Ivory White
- 21 Natural Cherry
- 22 Natural Beech
- 24 Yellow
- 25 Orange
- 26 Red
- 28 Blue
- 29 Grey
- 30 Turquoise
- 31 Chocolate
- 32 Pink

Components



Top diffuser
Black or White

Note: The standard top diffuser is white. Black is also available if you want no upward light diffusion.

Bottom diffuser
Transparent acrylic




Metal canopy
Brushed Nickel
ø 10 cm - disc ø 14 cm

Electrical cable
Transparent 2 m drop



Steel cable
4 x 2 m drop



Box size
117 x 114 x 50 cm
Wood crated for transport

Box volume
0,667 m³

Weight
Gross - 52,2 Kg | W - BK
Net - 14,7 Kg
Gross - 49,7 Kg | 21 - 26
Net - 9,6 Kg



T5

Linear Fluorescent
6 x 24 W
(included)

Energy class

| | |
|--|---------------|
| | Tube included |
| | |
| | |
| | |



Ballast

- TRIDONIC
2 units - Ref. 22185212
- TRIDONIC
2 units - Ref. 22176209
- BAG
3 units - Ref. 10097296
+ Remote Control - DANLERS


Details


| Input Voltage | Luminous Flux * | CRI | Watt. | Total Watt. | CCT | Lifetime (L70) |
|---------------|-----------------|-----|----------|-------------|--------|----------------|
| 220 - 250V | 2095 lm | 85 | 6 x 24 W | 144 W | 3000 K | 30000h |

* Measurements taken using matt white outer shell and white shades, Veneer Ref: 20 Ivory White



References

 SPRO SG W LED DIM0-10V
SPRO SG BK LED DIM0-10V
SPRO SG 21 LED DIM0-10V
SPRO SG 26 LED DIM0-10V

 SPRO SG W LED DIMBT
SPRO SG BK LED DIMBT
SPRO SG 21 LED DIMBT
SPRO SG 26 LED DIMBT



Awards


HD Las Vegas 2012



Shade / Wood Outer Shell

Opaque Wood Outer shell *

-  21 Natural Cherry
-  26 Red tulip poplar

Spiral colours *

-  21 Natural Cherry
-  26 Red

* Additional colours available on request.

Certificates



Class I

Dimmable:
120 - 277V

Bluetooth Dimming:
220 - 240V

Shade / Acrylic Outer Shell

Opaque Acrylic Outer shell

-  W Matt White
-  BK Matt Black

Spiral colours

-  20 Ivory White
-  21 Natural Cherry
-  22 Natural Beech
-  24 Yellow
-  25 Orange
-  26 Red
-  28 Blue
-  29 Grey
-  30 Turquoise
-  31 Chocolate
-  32 Pink



REF. SPRO SG LED 21
Spiro Large

Components

Packaging



Top diffuser
Black or White

Note: The standard top diffuser is white. Black is also available if you want no upward light diffusion.

Bottom diffuser
Transparent acrylic



Metal canopy
Brushed Nickel
ø 23 cm

Electrical cable
Transparent 2 m drop




Steel cable
4 x 2 m drop



Box size
117 x 114 x 50 cm
Wood crated for transport

Box volume
0,667 m³

Weight
Gross - 53,6 Kg | W - BK
Net - 17 Kg
Gross - 52,1 Kg | 21 - 26
Net - 11,9 Kg

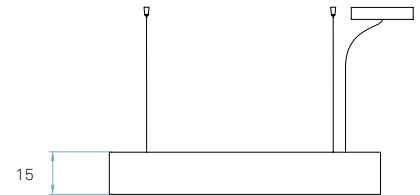

LED


 Linear Module
9 x 8,1 W 700mA


Energy class

 A⁺
LED integrated




Driver

 EFORE
1 unit - Ref. RCL030-0700B
1 unit - Ref. RCL050-1400B

 EFORE
1 unit - Ref. RCL030-0700B
1 unit - Ref. RCL050-1400B
+ Bluetooth Control - CASAMBI / ELT
1 unit - Ref. CBU - ASD

Driver housed in canopy.



ø 96

Details

| Input Voltage | Luminous Flux * | CRI | Watt. | CCT | Lifetime (L70) |
|-------------------------|--|-----|-------|--------|----------------|
| 120 - 277V / 220 - 240V | 2093 lm ⁽¹⁾ 1347 lm ⁽²⁾ | 90 | 85 W | 3000 K | 40000h |

* (1) Measurements taken using matt white outer shell and white shades, Veneer Ref: 20 Ivory White
(2) Measurements taken using matt white outer shell and white shades, Veneer Ref: 21 Natural Cherry

