






Fluorescent Totem / SMALL SUSPENSION
by Burkhard Dämmer & Marivi Calvo



REF. TOT3 S 22
Totem 3 - Small

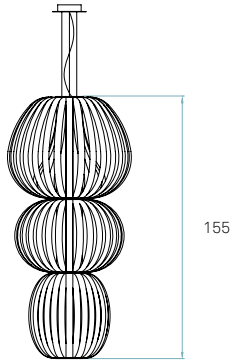





References

-  TOT3 S
-  TOT3 S DIM
-  TOT3 S DIMRC


Certificates

-  CE
- Class I
- 220 - 250V
-  FSC
www.fsc.org
FSC® C110841
The mark of responsible forestry


Wood shade colours

-  20 Ivory White
-  21 Natural Cherry
-  22 Natural Beech
-  24 Yellow
-  25 Orange
-  26 Red
-  28 Blue
-  29 Grey
-  30 Turquoise
-  31 Chocolate
-  32 Pink

Components

-  **Metal canopy**
Brushed Nickel
ø 14 cm - disc ø 20 cm
- Electrical cable**
Transparent 2 m drop
- Steel cable**
3 x 2 m drop

Packaging


-  **Box size**
Shades
box 1: 76 x 76 x 69 cm
0,399 m³ | 5,6 Kg
box 2: 66 x 66 x 52 cm
0,227 m³ | 6,8 Kg
box 3: 51 x 51 x 62 cm
0,161 m³ | 4,1 Kg
Electrical kit
box 4: 181 x 31 x 22 cm
0,123 m³ | 9,4 Kg






Weight
Gross - 25,9 Kg
Net - 10,5 Kg



Required
Shade to base mount
Difficulty: *****






T5

Linear Fluorescent
2 x 35 W
(included)

Energy class
 A++
 A+ Tube included
 A
 B  A+





Ballast

-  TRIDONIC
1 unit - Ref. 22185148
-  TRIDONIC
1 unit - Ref. 22185106
-  BAG
1 unit - Ref. 10097294
+ Remote Control - DANLERS

Details

Input Voltage	Luminous Flux	CRI	Watt.	Total Watt.	CCT	Lifetime (L70)
220 - 250V	N/A	85	2 x 35 W	70 W	3000 K	24000h

References

-  **TOT3 S LED DIMO-10V**
-  **TOT3 S LED DIMBT**

Certificates



Class I

Dimmable:
120 - 277V

Bluetooth Dimming:
220 - 240V



FSC
www.fsc.org
FSC® C110841
The mark of responsible forestry


Wood shade colours

-  20 Ivory White
-  21 Natural Cherry
-  22 Natural Beech
-  24 Yellow
-  25 Orange
-  26 Red
-  28 Blue
-  29 Grey
-  30 Turquoise
-  31 Chocolate
-  32 Pink




REF. TOT3 S LED 22 & TOT4 S LED 22
Totem 3 - Small & Totem 4 - Medium


Components



-  **Metal canopy**
Brushed Nickel
ø 14 cm - disc ø 20 cm
- Electrical cable**
Transparent 2 m drop
- Steel cable**
3 x 2 m drop

Packaging


-  **Box size**
Shades
box 1: 76 x 76 x 69 cm
0,399 m³ | 5,6 Kg
box 2: 66 x 66 x 52 cm
0,227 m³ | 6,8 Kg
box 3: 51 x 51 x 62 cm
0,161 m³ | 4,1 Kg
Electrical kit
box 4: 181 x 31 x 22 cm
0,123 m³ | 9,4 Kg


Weight
Gross - 25,9 Kg
Net - 9,9 Kg


 **Required**
Shade to base mount
Difficulty: *****

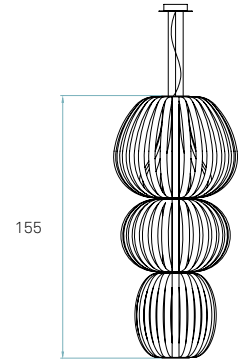


ø 73



 **LED**

LED
 **Linear Module**
20 x 5,5 W 350mA

Energy class
 **A+**
LED integrated

 **INFO**

Driver

-  EFORE
2 units - Ref. RCL030-0900B
-  EFORE
2 units - Ref. RCL030-0900B
+
Bluetooth Control - CASAMBI / ELT
1 unit - Ref. CBU - ASD

Driver housed in fixture.



Details

Input Voltage	Luminous Flux	CRI	Watt.	CCT	Lifetime (L70)
120 - 277V	N/A	90	60 W	3000 K	40000h
220 - 240V					

Fluorescent Totem / MEDIUM SUSPENSION
by Burkhard Dämmer & Mariví Calvo



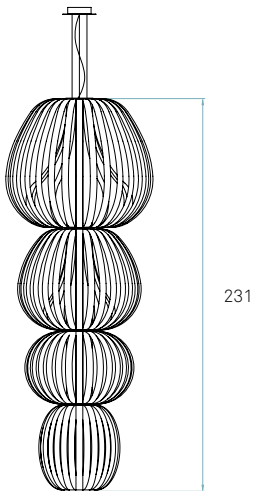


REF. TOT3 S 20, 28 & TOT4 S 20
Totem 3 - Small & Totem 4 - Medium



ø 86



References

-  TOT4 S
-  TOT4 S DIM
-  TOT4 S DIMRC




Certificates

- 
- Class I
- 220 - 250V
- 

Wood shade colours

-  20 Ivory White
-  21 Natural Cherry
-  22 Natural Beech
-  24 Yellow
-  25 Orange
-  26 Red
-  28 Blue
-  29 Grey
-  30 Turquoise
-  31 Chocolate
-  32 Pink


Components






-  **Metal canopy**
Brushed Nickel
ø 14 cm - disc ø 20 cm
-  **Electrical cable**
Transparent 2 m drop
-  **Steel cable**
3 x 2 m drop

Packaging




-  **Box size**
Shades
box 1: 101 x 101 x 84 cm
0,857 m³ | 10,1Kg
box 2: 76 x 76 x 69 cm
0,399 m³ | 5,6 Kg
box 3: 66 x 66 x 52 cm
0,227 m³ | 6,8 Kg
box 4: 51 x 51 x 62 cm
0,161 m³ | 4,1 Kg
-  **Electrical kit**
box 5: 181 x 31 x 22 cm
0,123 m³ | 10,7 Kg
-  **Weight**
Gross - 37,3 Kg
Net - 13,7 Kg
-  **Required**
Shade to base mount
Difficulty: *****



- T5**
- 
- Linear Fluorescent**
2 x 14 W
2 x 35 W
(included)

- Energy class**
-  A⁺⁺
-  A⁺
-  A
-  B
-  A⁺ Tube included



- Ballast**
-  TRIDONIC
2 units - Ref. 22185148
-  TRIDONIC
1 unit - Ref. 22185106
1 unit - Ref. 22185104
-  BAG
2 units - Ref. 10097294
+ Remote Control - DANLERS

Details

Input Voltage	Luminous Flux	CRI	Watt.	Total Watt.	CCT	Lifetime (L70)
220 - 250V	N/A	85	2 x 14 W 2 x 35 W	28 W 70 W	3000 K	24000h



References

TOT4 S LED DIMO-10V

TOT4 S LED DIMBT

Certificates



Class I


Dimmable:
120 - 277V

Bluetooth Dimming:
220 - 240V



Wood shade colours

- 20 Ivory White
- 21 Natural Cherry
- 22 Natural Beech
- 24 Yellow
- 25 Orange
- 26 Red
- 28 Blue
- 29 Grey
- 30 Turquoise
- 31 Chocolate
- 32 Pink

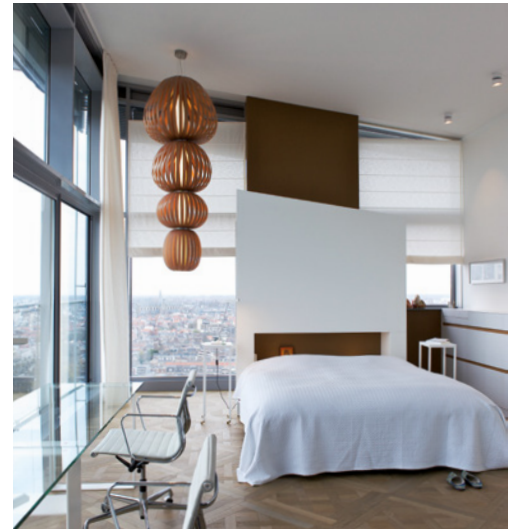

REF. TOT4 S LED 21
Totem 4 - Medium


Components



Metal canopy
Brushed Nickel
ø 14 cm - disc ø 20 cm

Electrical cable
Transparent 2 m drop

Steel cable
3 x 2 m drop



Box size
Shades
box 1: 101 x 101 x 84 cm
0,857 m³ | 10,1 Kg
box 2: 76 x 76 x 69 cm
0,399 m³ | 5,6 Kg
box 3: 66 x 66 x 52 cm
0,227 m³ | 6,8 Kg
box 4: 51 x 51 x 62 cm
0,161 m³ | 4,1 Kg

Electrical kit
box 5: 181 x 31 x 22 cm
0,123 m³ | 9,7 Kg

Weight
Gross - 36,3 Kg
Net - 13,3 Kg



Required
Shade to base mount
Difficulty: *****




LED
Linear Module
28 x 5,5 W 350mA

Energy class
A+
LED integrated



Driver
 EFORE
3 units - Ref. RCL030-0900B
 EFORE
3 units - Ref. RCL030-0900B
+
Bluetooth Control - CASAMBI / ELT
1 unit - Ref. CBU - ASD


Driver housed in fixture.

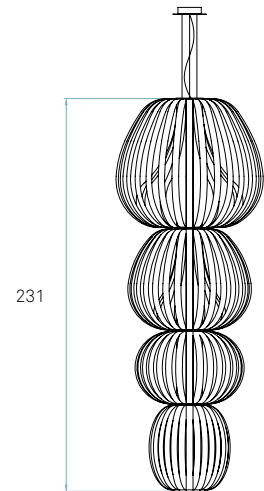

231

Details

Input Voltage	Luminous Flux	CRI	Watt.	CCT	Lifetime (L70)
120 - 277V	N/A	90	90 W	3000 K	40000h
220 - 240V					



ø 86